

MODEL LTX-30

SYMMETRICAL 2-POST LIFT
CAPACITY: 30,000 LBS





THIS LIFT HAS BEEN TESTED AND CERTIFIED BY A NATIONALLY RECOGNIZED TESTING LABORATORY (NRTL) TO MEET THE REQUIREMENTS OF U.L. STANDARD 201 FOR GARAGE EQUIPMENT AND ANSI/ALI ALCTV-2017 FOR AUTOMOTIVE LIFT CONSTRUCTION.

- SPECIFICATIONS:
- CAPACITY.....30,000 LBS.
 - LIFTING SPEED.....142 SECONDS
 - MOTOR RATING.....5 HP, 220 VAC, 3 PHASE
 - SYNCHRONIZATION.....HYDRAULIC FLUID DISPLACEMENT USING NO CHAINS, CABLES NOR OVERHEAD OBSTRUCTIONS
 - MINIMUM LIFTING PAD HEIGHT.....1-5/8"
 - LIFTING HEIGHT (STROKE).....6 FEET
 - ARM HEIGHT @ FULL RISE.....6'-1-5/8"
 - MAX. PAD HEIGHT WITH ADAPTERS.....6'-2 7/8"
 - OVERALL WIDTH.....15 FEET
 - WIDTH BETWEEN POSTS.....12 FEET
 - WIDTH BETWEEN CARRIAGE.....9'-9"
 - COLUMN HEIGHT.....10'-1 1/2"
 - MAX. CYLINDER HEIGHT.....13'-6 5/8"
 - OVERHEAD HYDRAULIC LINE HEIGHT.....16 FEET
 - SHIPPING WEIGHT.....8850 LBS. APPROX.
 - ANCHORING SYSTEM.....1" DIA X 10" LG WEJ-IT ANCHORS IN 4000 PSI CONCRETE
 - MECHANICAL SAFETY LOCKS.....MULTI-POSITION EVERY 6"
 - MECHANICAL SAFETY RELEASE.....SINGLE POINT LOCK RELEASE @ CONTROL
 - HYDRAULIC SAFETY SYSTEM.....AUTOMATIC: ALL POSITION
 - SWING ARM LOCKS.....AUTOMATIC LOCKING UPON ASCENT
 - CYLINDERS.....2 (1 PER COLUMN)
 - CARRIAGE BEARINGS.....(16) 5" DIAMETER (8 PER CARRIAGE)
DOUBLE SEALED SELF LUBRICATING
 - THRUST BEARINGS.....(8) 4" DIAMETER (4 PER CARRIAGE)
DOUBLE SEALED SELF LUBRICATING
 - FLOOR ACCESS BETWEEN POSTS.....CLEAR AND UNOBSTRUCTED



MOHAWK LIFTS LLC
P.O. BOX 110
65 VROOMAN AVENUE
AMSTERDAM, NY 12010
PHN: (800) 833-2006
IN NY: (518) 842-1431
FAX: (518) 842-1289

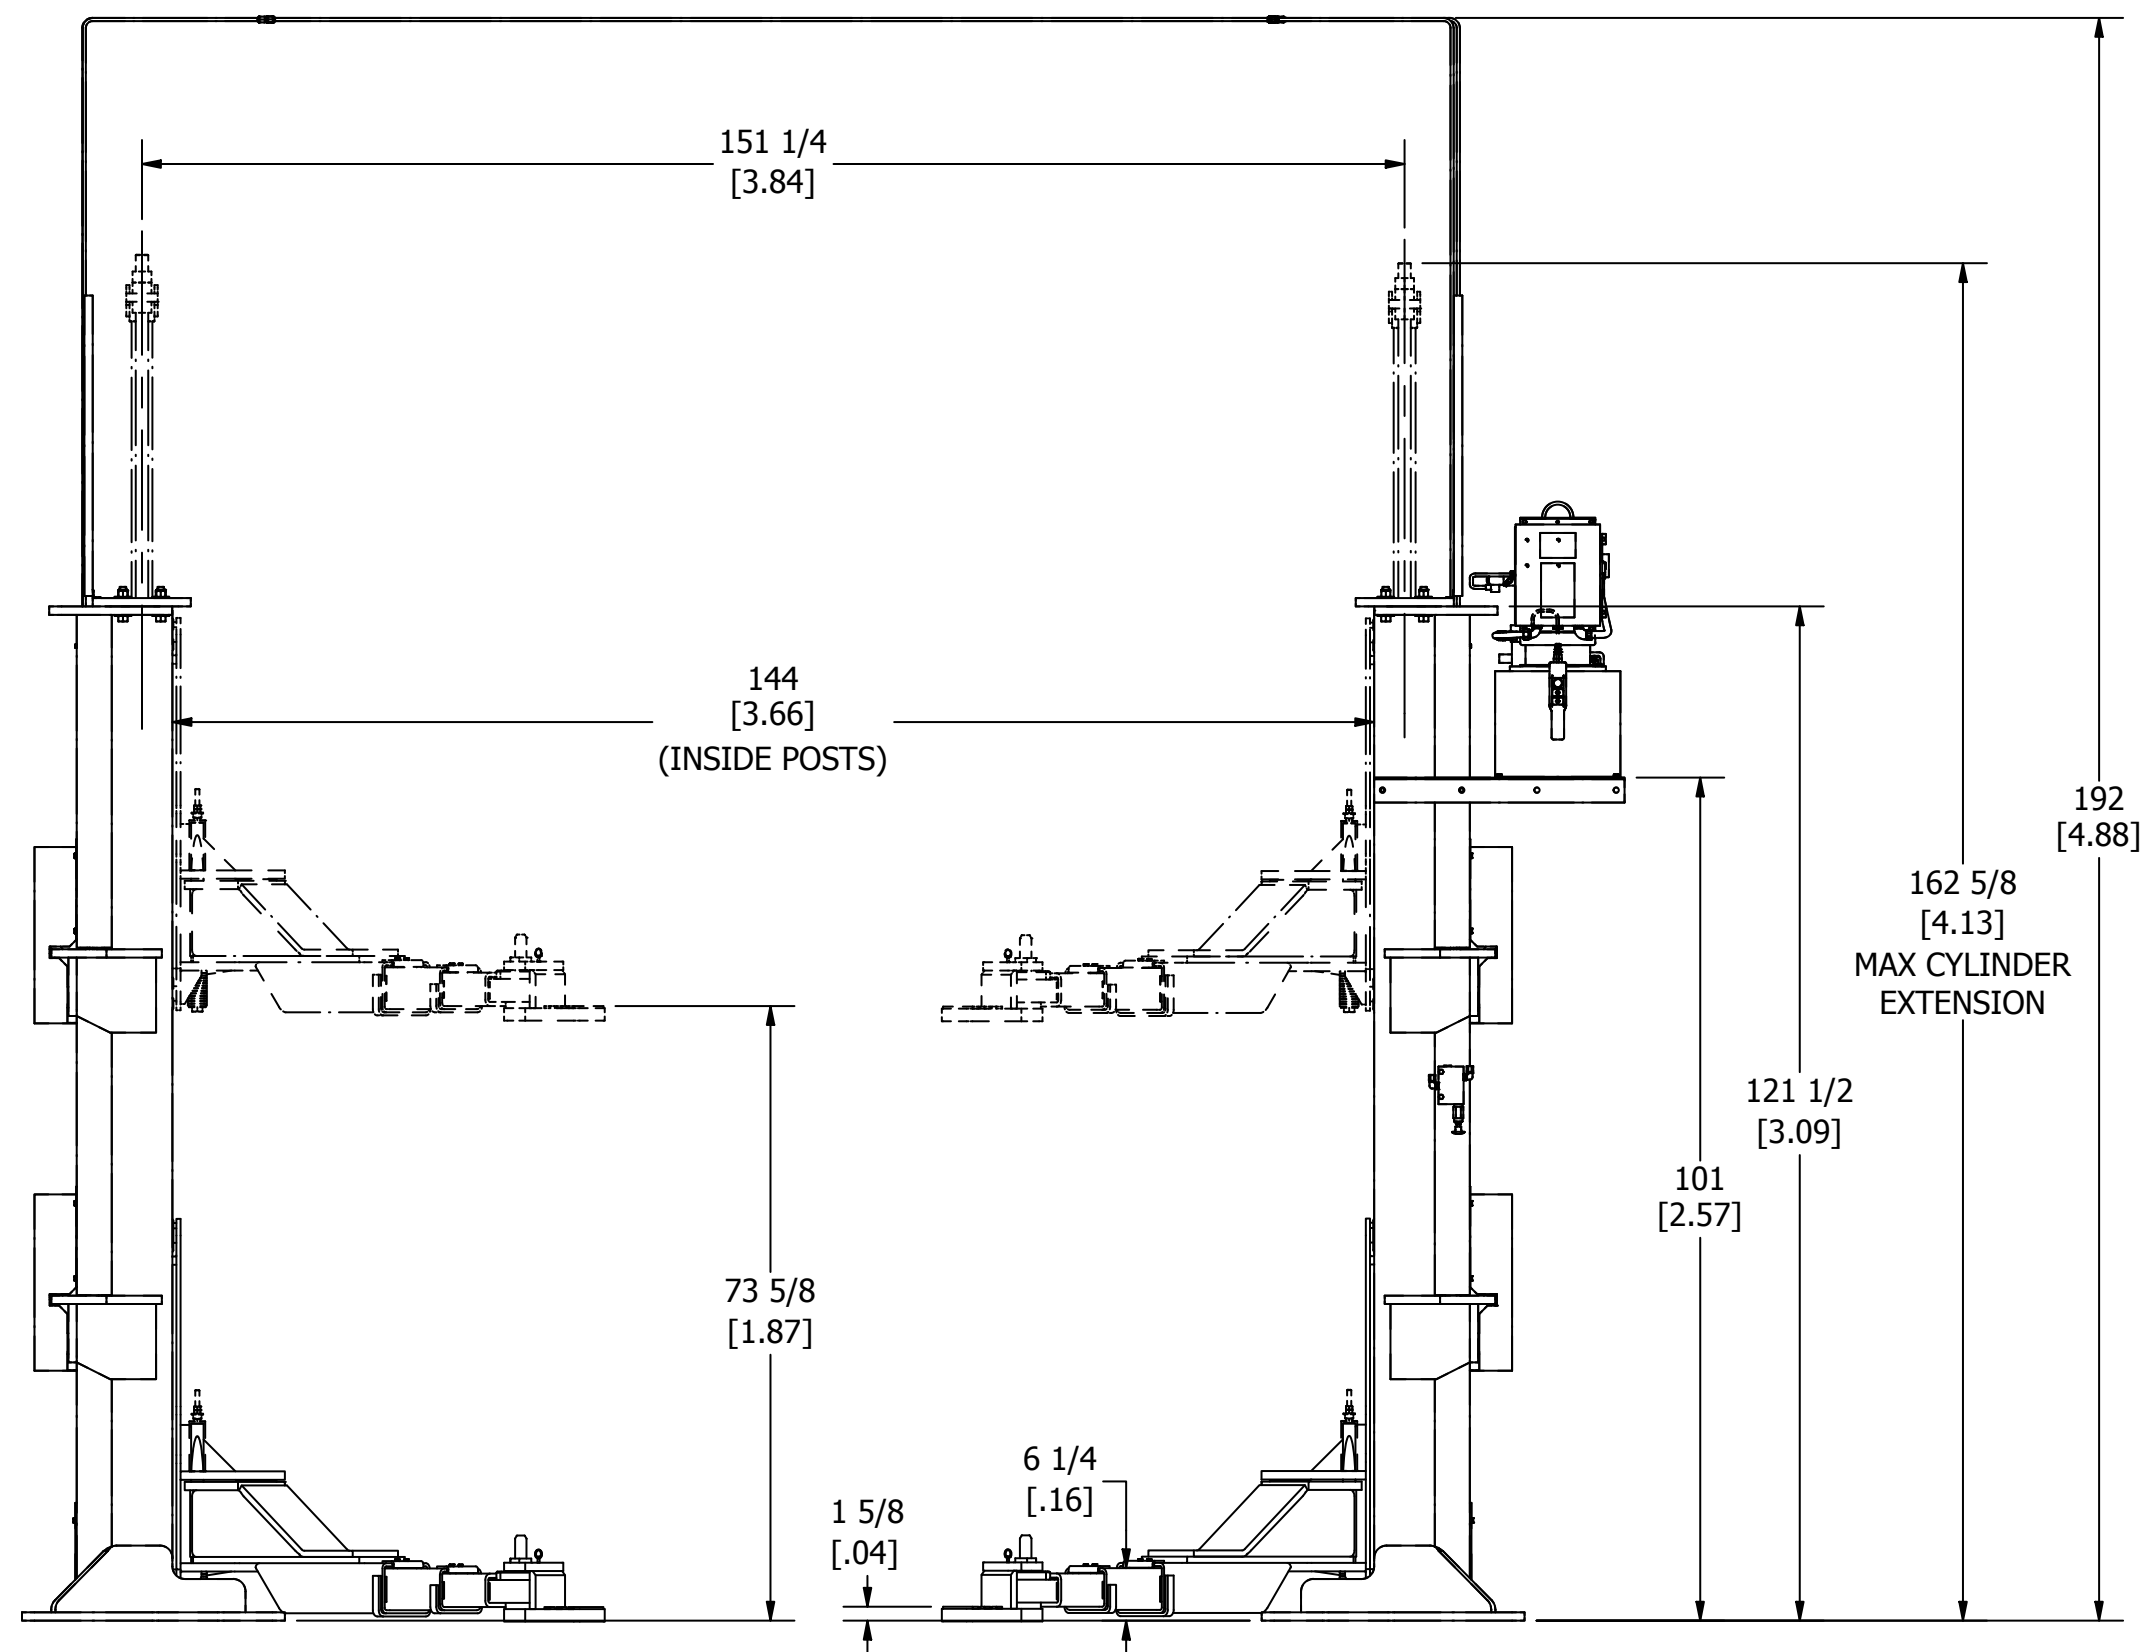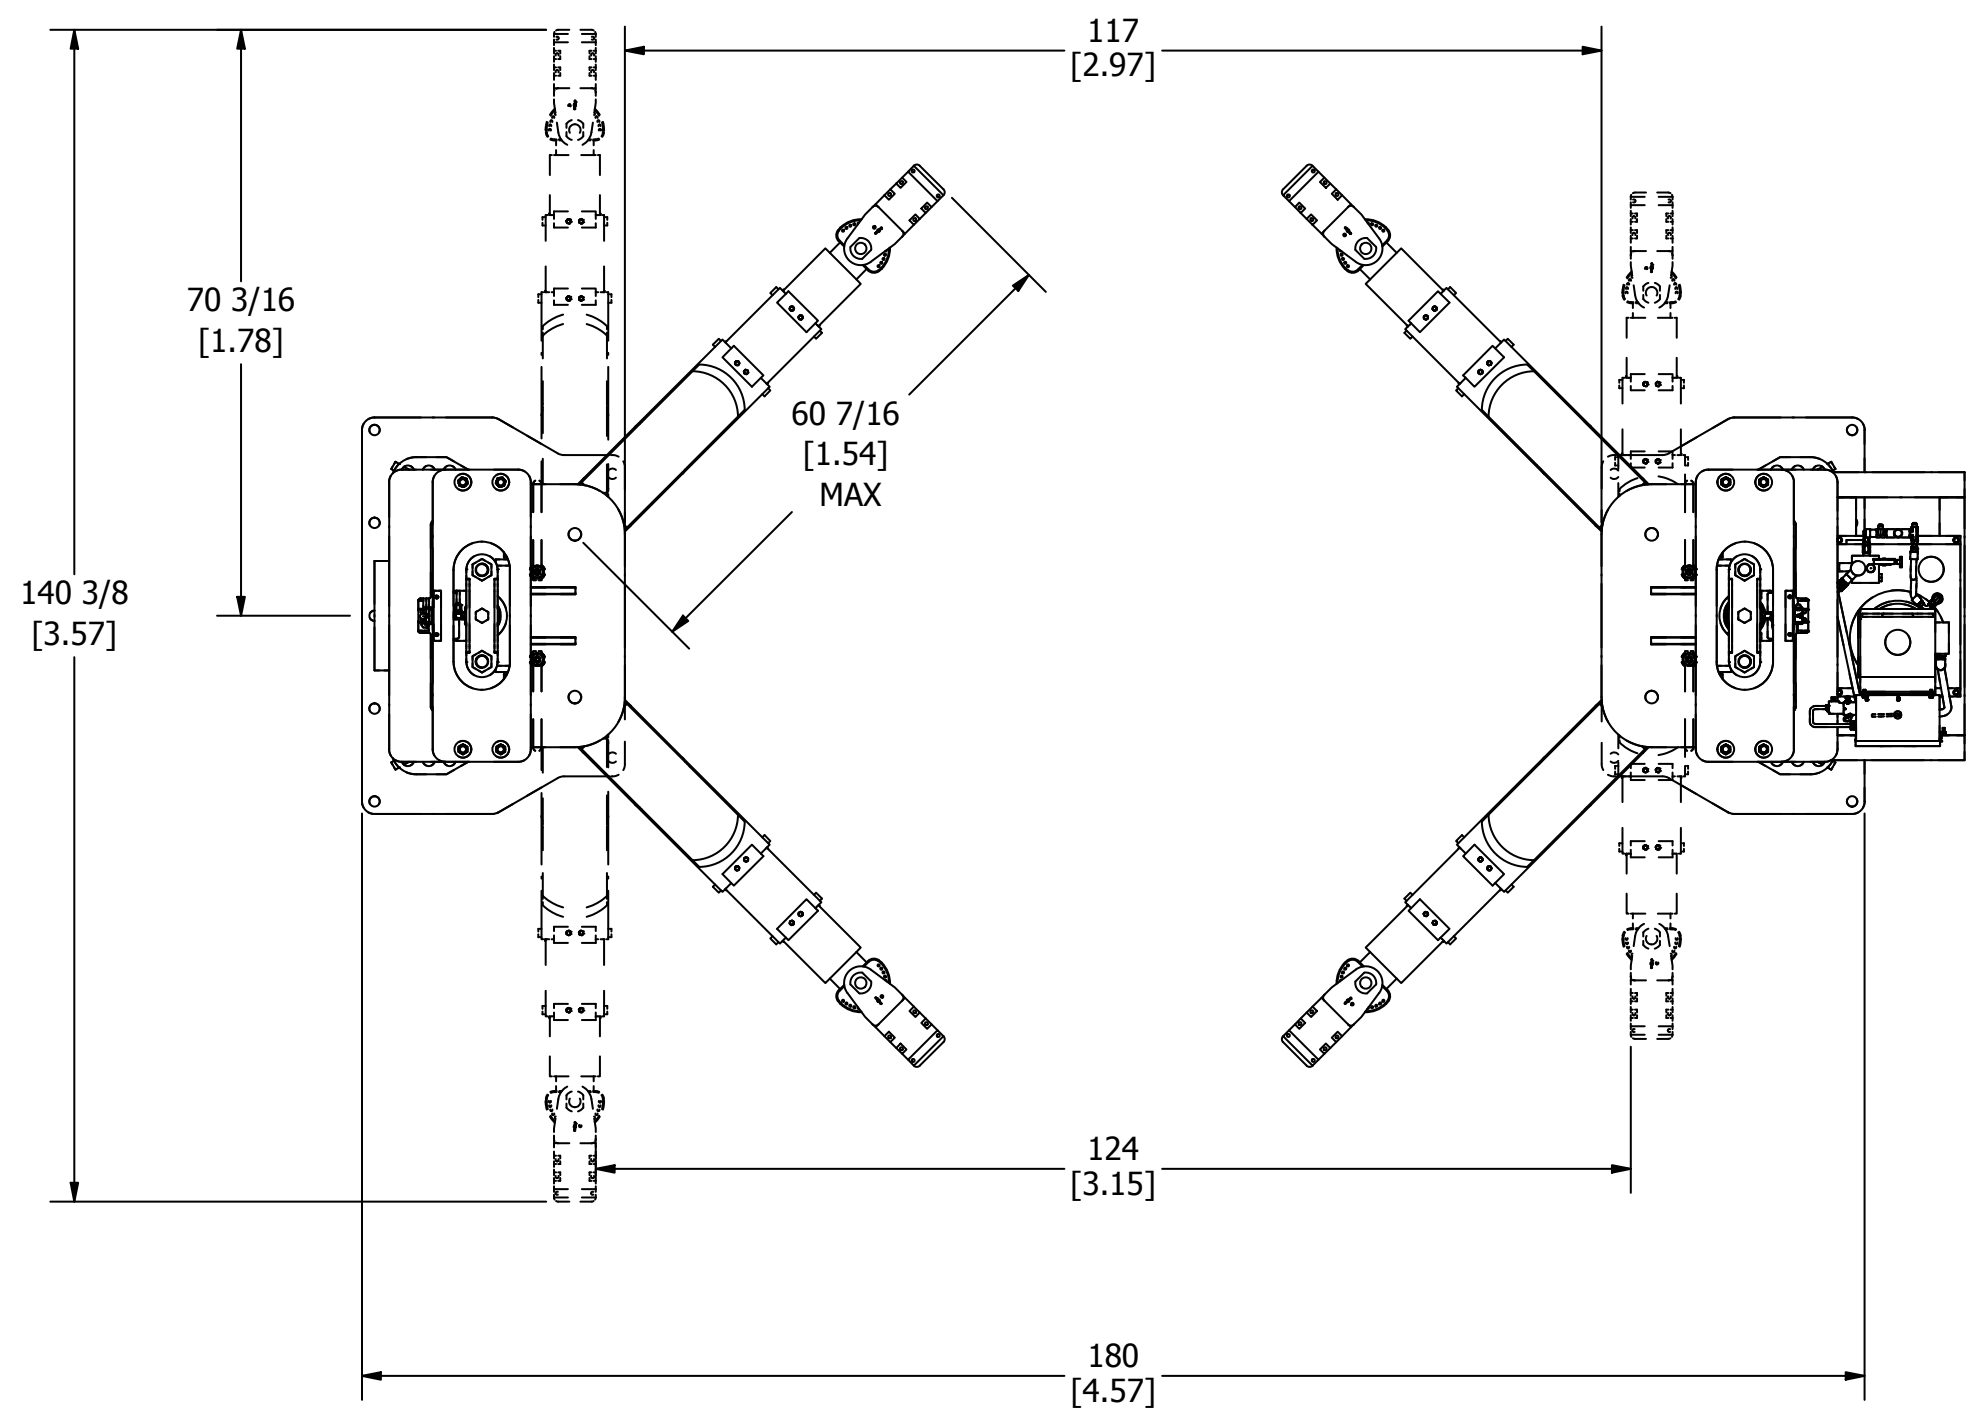

UNITS = INCH [METERS]

NOTICE OF CONFIDENTIAL INFORMATION
INFORMATION CONTAINED HEREIN IS CONFIDENTIAL AND PROPERTY OF MOHAWK RESOURCES LTD. WHERE DRAWING IS FURNISHED TO OTHERS IT SHALL BE USED SOLELY FOR PURPOSES OF INSPECTION, INSTALLATION, OR MAINTENANCE. THE INFORMATION SHALL NOT BE USED OR DISCLOSED BY THE RECIPIENT FOR ANY OTHER PURPOSES WHATSOEVER.

- NOTES
1. REMOVE ALL SHARP CORNERS & EDGES.
 2. UNLESS OTHERWISE SPECIFIED, SURFACE FINISH TO BE 125 RMS.
 3. REFER TO MOHAWK RESOURCES LTD. WELDING PROCEDURE FOR ALL WELDING.

ALL DIMENSIONS IN INCHES UNLESS OTHERWISE NOTED

| TOLERANCES | |
|------------|------|
| ANGULAR | 1 |
| FRACTIONAL | 1/32 |
| DECIMAL | .03 |
| 0.XXX | .03 |
| 0.XXX | .005 |

| SCALE | DRAWN | MOHAWK LIFTS LLC | |
|---------|-------------|------------------------------|-------------|
| NTS | SB | TITLE | |
| CHECKED | APPROVED | ILLUSTRATION & SPECS, LTX-30 | |
| DATE | WEIGHT | SIZE | PART NUMBER |
| 9/14/23 | 7875.6 lbs. | D | LTX-30 |

FROM

NEXT ASSEMBLY